


Snowcat Belt

with rubberized edges type 1200/3 and 1600/4



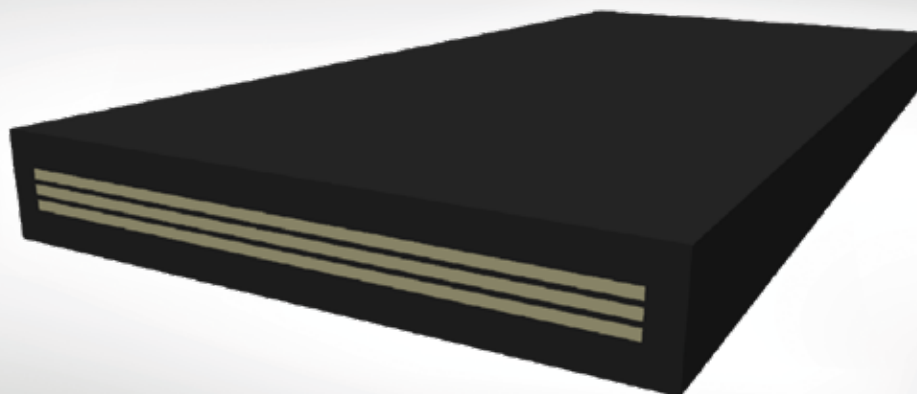

Dimensions	Unit	Values	
Type		EP1200/3	EP1600/4
Tension material		special fabric	special fabric
Number of plies		3	4
Available widths	mm	100 - 350	100 - 350
Length	m	5 - 100 (depending on order)	5 - 100 (depending on order)
Width of the rubberized edge	mm	5	5
Total belt thickness	mm	11,6	13,0
Thick carrying side	mm	2,5	2,5
Thick running side	mm	2,5	2,5
Thickness of the carcass	mm	6,6	8,0
Tensile strength	N/mm	1200	1600
Shore hardness	Shore A	65	65
Cover plate	Shore A	65	65
Cover plate	-	smooth	smooth
Freezing temperature	°C	-60	-60
Cold resistance	°C	-45	-45
Heat resistance	°C	80	80

Perforation according to specification possible
Date of issue: 29.07.2019

All measured values were determined according to the latest version of the respective DIN.



ARTEMIS Kautschuk- und Kunststoff- Technik GmbH
 Rothwiese 4
 30559 Hannover
 Germany
 ☎ +49 511 959 280
 📠 +49 511 959 285 5
 ✉ info@artemis-kautschuk.de
 🌐 www.artemis-kautschuk.de



Disclaimer

This information is based on our current state of knowledge and provides an overview of our products and possible applications. The data is intended only for the safe handling of the product. Artemis Kautschuk- und Kunststoff- Technik GmbH disclaims all liability for personal injury and property damage resulting from improper use of the product. No guarantees for the product properties or for the agreement of the mentioned products for special applications are derived from this document. Existing copyrights and name rights must be observed. We guarantee the quality of our products according to our general terms and conditions.